



Keen Ocean Industrial Limited

Switching Adaptor

3W Series

Technical data

| | |
|------------------------|-------------|
| Input Voltage | 100-240V AC |
| Frequency | 50-60Hz |
| Output Voltage | 5-15VDC |
| Output Current | 0.01-0.6A |
| Low Standby power | 0.3W Max |
| Output Power (Maximum) | 3W |



Environmental Specification

| | |
|-----------------------|--------------------------------|
| Operation Temperature | 0°C to 40°C at maximum load |
| Storage Temperature | -20°C to 60°C |
| Humidity | 5% to 95% non condensing |

Reliability

| | |
|------------------|--|
| MTBF Calculation | 50,000 hours at maximum load levels and an ambient temperature of 25°C |
|------------------|--|

Safety approval


| | |
|--------------------|--------------------|
| cULus (UL60950-1) | AR (IEC60950-1) |
| GS (EN60950-1) | KC (K60950-1) |
| BS (EN60950-1) | CE Mark |
| PSE (J60950-H19) | FCC Mark (Part-15) |
| SAA (AS/NZ60950-1) | EMC (EN55022) |
| CCC (GB4943) | CB |

Energy Saving

Meet CEC,
MEPS (Level V),
EUP requirement
(With test report)

Material

ROHS Compliant

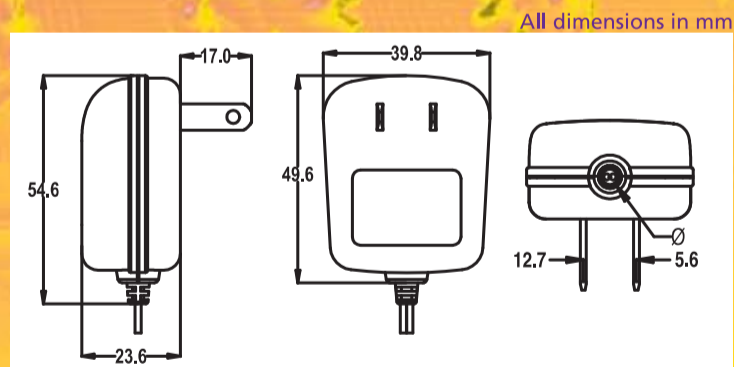

Keen Ocean Industrial Limited

Unit D, 26/F Shield Industrial Centre, 84-92 Chai Wan Kok St., Tsuen Wan, N. T. Hong Kong
 Tel : (852) 3102 9700 Website : www.keenocan.com.hk
 Fax : (852) 3102 9710 Email : keenocan@keenocan.com.hk